




1-800-668-0324  
 Outside Canada and the US: 1-705-855-2363

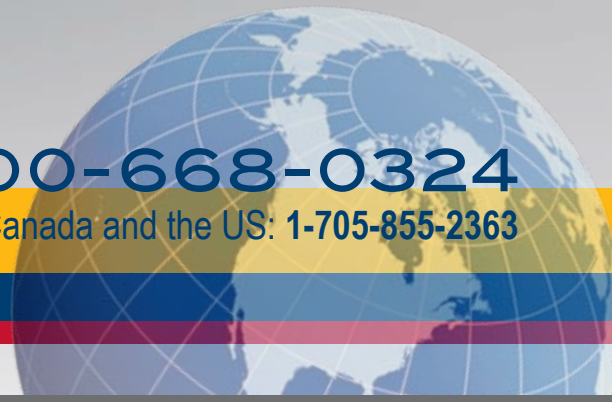

## TM-8X series

### Model TM-8X, Model TM-8X-E, Model TM-8XS, Model TM-8XS-E

- Flow thru bar design
  - ideal for heavy equipment repair
  - allows for setups between bores
- Rugged, reliable, heavy-duty
- Choice of variable speed or quick change fixed speed power
- Adjustable mounting system for operator ease
- Remote pendant control
- All B&D boring bars are chrome plated for extra hardness and straightened for improved machining

PORTABLE ALIGN BORING

Feature:	TM-8X	TM-8X-E	TM-8XS	TM-8XS-E
Boring range (standard)	2" - 10"	2"-10"	1 1/2" - 10"	1 1/2" - 10"
Flow thru bar design	Yes	Yes	Yes	Yes
Boring bar diam.	1 3/4"	1 3/4"	1 3/4", 1 1/4"	1 3/4", 1 1/4"
Chrome plated	Yes	Yes	Yes	Yes
Straightened	Yes	Yes	Yes	Yes
Tool ports	1/2"	1/2"	1/2", 3/8"	1/2", 3/8"
Power choices	<b>Hydraulic:</b> 1.5 Hp 110/220 V fixed, 35 rpm, 75 rpm <b>Optional power choices:</b> Fixed speed 20 rpm or 120 rpm Model TM-8X-V: 1.5Hp 110/220V variable Model TM8X-V: 5Hp 3Ph variable	<b>Electric:</b> Infinitely variable - 30-230 rpm <b>Optional power choices:</b> 15-115 rpm high torque	<b>Hydraulic:</b> 1.5 Hp 110/220V fixed, 35 rpm, 75 rpm <b>Optional power choices:</b> Fixed speed 20 rpm or 120 rpm Model TM-8XS-V: 1.5Hp 110/220V variable Model TM8XS 5 Hp: 5Hp 3Ph variable	<b>Electric:</b> Infinitely variable - 30-230 rpm <b>Optional power choices:</b> 15-115 rpm high torque
Direction	Fwd-Neut-Rev	Fwd-Neut-Rev	Fwd-Neut-Rev	Fwd-Neut-Rev
Feed	Mechanical	Mechanical	Mechanical	Mechanical
Adjustable mounts	Yes	Yes	Yes	Yes